

**PRODUCT  
DATA SHEET**

# Essentials 450

## Vinyl Collection 2014

January 2014

**Type of flooring**

**ISO 26986**

**Vinyl Floorcovering**

**Class of use**

**ISO 10874**



**Class**

**23**

**31**

### Description



**ISO 24346**  
(EN 428)

**4,50 mm**



**ISO 24340**  
(EN 429)

**0,30 mm**



**ISO 24341**  
(EN 426)

**19 m**  
**4+3+2m**



**ISO 23997**  
(EN 430)

**3,000 kg/m<sup>2</sup>**



**EN 660-2**  
Abrasion group

**T**



**ISO 4918**  
(EN 425)  
Castor wheel test

**OK**



**EN ISO 717/2**  
Impact sound absorption

**ca. 20 dB**



**ISO 24343-1**  
(EN 433)  
Static indentation

**≤ 0,35 mm**

### Other Characteristics



**ISO 105/B02**  
Light fastness

**≥ 6**



**Slip resistance**  
EN 13893  
DIN 51130

**μ ≥ 0,30**  
**R10**



**Fire Classification**  
EN 13501-1  
Report N° :

**Cfl-s1**  
**RA10-0252**



**ISO 23999**  
(EN 434)  
Dimensional stability

**≤ 0,40 %**



**Recyclable**

**OK**



**EN 1815**  
Static electrical  
propensity

**≤ 2 kV**




**ISO 10456**  
(EN 12524)  
Thermal resistance  
for underfloor heating

**0,07 m<sup>2</sup>/kW**



**Chemical  
resistance**

**OK**

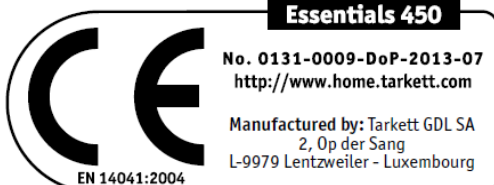

Although the utmost care is taken, the data here given could be imprecise and liable to modifications of a technical nature. In its strive to improve its floor solutions, Tarkett reserves the right to modify their technical specifications, colours and materials at any moment and without prior notice.